






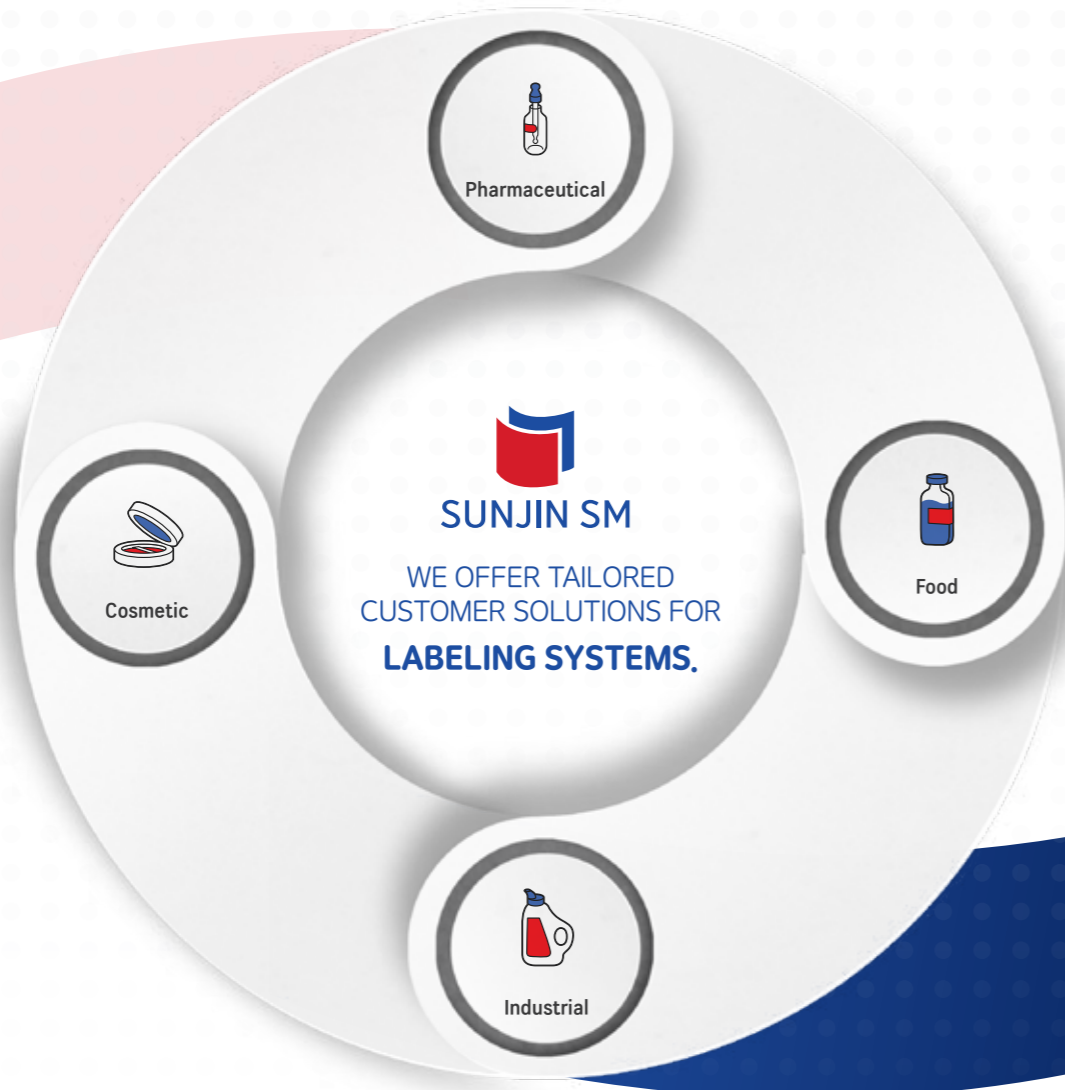

**SUNJIN SM**  
Labeling Since 1982

BETTER  
PRODUCT

**SUNJIN SM**  
**AUTO SELF-ADHESIVE**



Sunjin System Machinery is one of the Korean leaders in **supply of labeling systems** with over 40 years experience.

-   
**Endurance**
-   
**Responsibility**
-   
**Quality**
-   
**Partnership**

**WE PROVIDE OUR CUSTOMERS WITH**

- More than 40 years of experience in the design, construction and servicing of sticker labelers.
- Our own development and construction department for mechanical and electrical engineering.
- World-wide network of partners for local and personal customer care.



**STANDARD**

**MODEL NO. SJC-1000S**  
**TOP LABELER**



Size: 2,200mm(L) x 1,200mm(w) x 1,800mm(H)

**Application**



**Standard Specifications**

- Container size: 10mm~150mm
- Max. label reel diameter: 300mm
- Speed: Variable up to 150ppm
- Electrical supply: 220V 1Ph 1Kw

**Features**

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

**Options**

- Hot stamping printer
- Rotary infeed-outfeed table

**MODEL NO. SJC-2000**  
**BOTTOM LABELER**



Size: 2,200mm(L) x 1,200mm(w) x 1,800mm(H)

**Application**



**Standard Specifications**

- Container size: 10mm~150mm
- Max. label reel diameter: 300mm
- Speed: Variable up to 150ppm
- Electrical supply: 220V 1Ph 1Kw

**Features**

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

**Options**

- Hot stamping printer
- Missing label detector & reject unit
- Rotary infeed-outfeed table

# STANDARD

## MODEL NO. SJC-3217 FRONT & BACK LABELER



Size: 2,200mm(L) x 1,800mm(w) x 1,800mm(H)

### Application



### Standard Specifications

- Container size: 10mm~150mm
- Max. label reel diameter: 300mm
- Speed: 60ppm or more
- Electrical & compressed air supply: 220V 1Ph 1Kw / 5~6bar

### Features

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

### Options


- Hot stamping, TTO, CIJ printer
- Missing label detector & reject unit
- Rotary infeed-outfeed table
- Servo motor drive for upper & conveyor belt

# STANDARD

## MODEL NO. SJC-3000 WRAP-AROUND LABELER (Basic)



Size: 2,200mm(L) x 1,800mm(w) x 1,800mm(H)

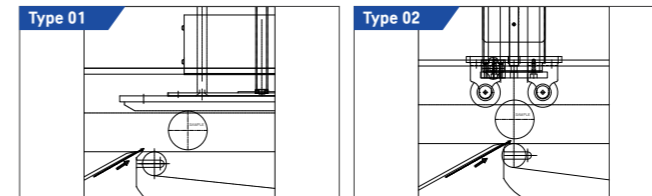

### Application



### Standard Specifications

- Container size: 10mm~150mm
- Max. label reel diameter: 300mm
- Speed: 50ppm or more
- Electrical & compressed air supply: 220V 1Ph 1Kw / 5~6bar

### Features

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

### Options

- Hot stamping, TTO, CIJ printer
- Missing label detector & reject unit
- Rotary infeed-outfeed table
- Type 1 or 2

## MODEL NO. SJC-3500 TAMPER-EVIDENT (Security) LABELER



Size: 2,000mm(L) x 1,200mm(w) x 1,800mm(H)

### Application



### Standard Specifications

- Container size: 10mm~150mm
- Max. label reel diameter: 300mm
- Speed: 50ppm or more
- Electrical & compressed air supply: 220V 1Ph 1Kw / 5~6bar

### Features

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change


### Options

- CIJ, TIJ printer
- Validation
- OCR/OCV vision system
- Integration for serialization
- Missing label detector & reject unit

## MODEL NO. SJC-3015 WRAP-AROUND LABELER (Advanced)



Size: 2,200mm(L) x 1,800mm(w) x 1,800mm(H)

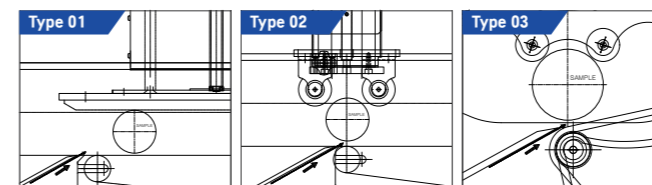

### Application



### Standard Specifications

- Container size: 10mm~150mm
- Max. label reel diameter: 300mm
- Speed: 50ppm or more
- Electrical & compressed air supply: 220V 1Ph 1Kw / 5~6bar


### Features

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

### Options


- Hot stamping, CIJ, TTO printer
- Missing label detector & reject unit
- Type 1, 2 or 3
- Validation
- OCR/OCV vision system

**MODEL NO. SC-2400 / 2404**  
LIPSTICK & MASCARA LABELER

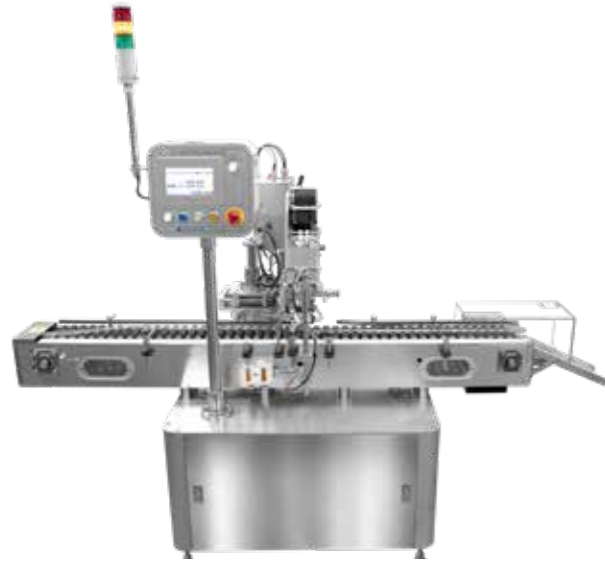

Size: 2,200mm(L) x 1,200mm(W) x 1,800mm(H)

Application



Standard Specifications



- Container size: Ø10mm~Ø30mm x 120mm(H)
- Max. label reel diameter: 300mm
- Speed: 50ppm or less
- Electrical & compressed air supply: 220V 1Ph 1Kw / 5~6bar

Features


- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

Options

- Hot stamping printer
- Missing label detector & reject unit
- Side & wrap around label applicator
- Interlocked door guard

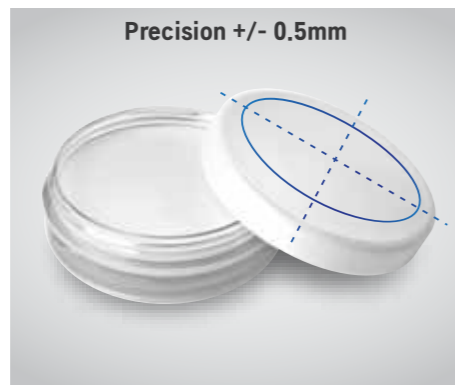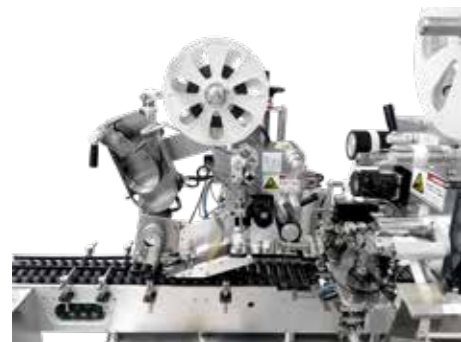

**MODEL NO. SJC-5700**  
CUSHION LABELER

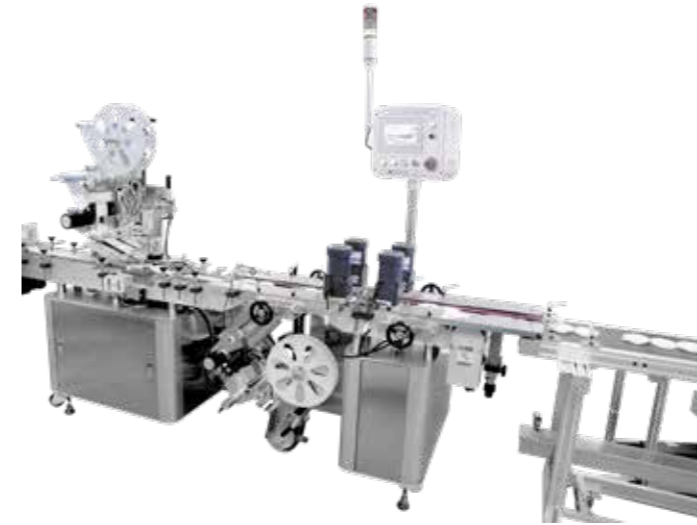

Size: 2,200mm(L) x 1,200mm(W) x 1,800mm(H)

Application



Standard Specifications



- Container size: Variable
- Max. label reel diameter: 300mm
- Speed: 45ppm or less
- Electrical & compressed air supply: 220V 1Ph 1Kw / 5~6bar

Features

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

Options

- Hot stamping printer
- Missing label detector & reject unit
- Bottom label applicator
- Interlocked door guard

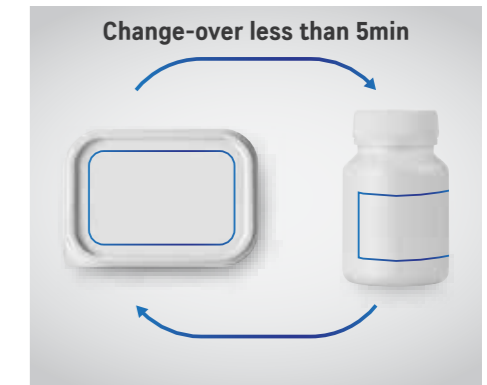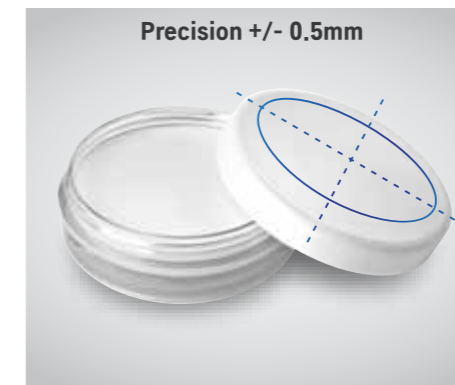


**MODEL NO. SP-3300W**  
**VIAL & AMPULE LABELER**



Size: 2,200mm(L) x 1,200mm(W) x 1,800mm(H)

**Application**



**Standard Specifications**

- Container size: Variable
- Max. label reel diameter: 300mm
- Speed: 550ppm based on 1ml ampule
- Electrical & compressed air supply: 220V 1Ph 2kw / 5~6bar

**Features**


- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

**Options**

- Hot stamping, TTO, TIJ, Laser printer
- Infeed & outfeed table
- Missing label detector & reject unit
- OCR/OCV vision system
- Validation



**MODEL NO. SDL-7000S**  
**LEAFLET LABELER FULL LINE SYSTEM**

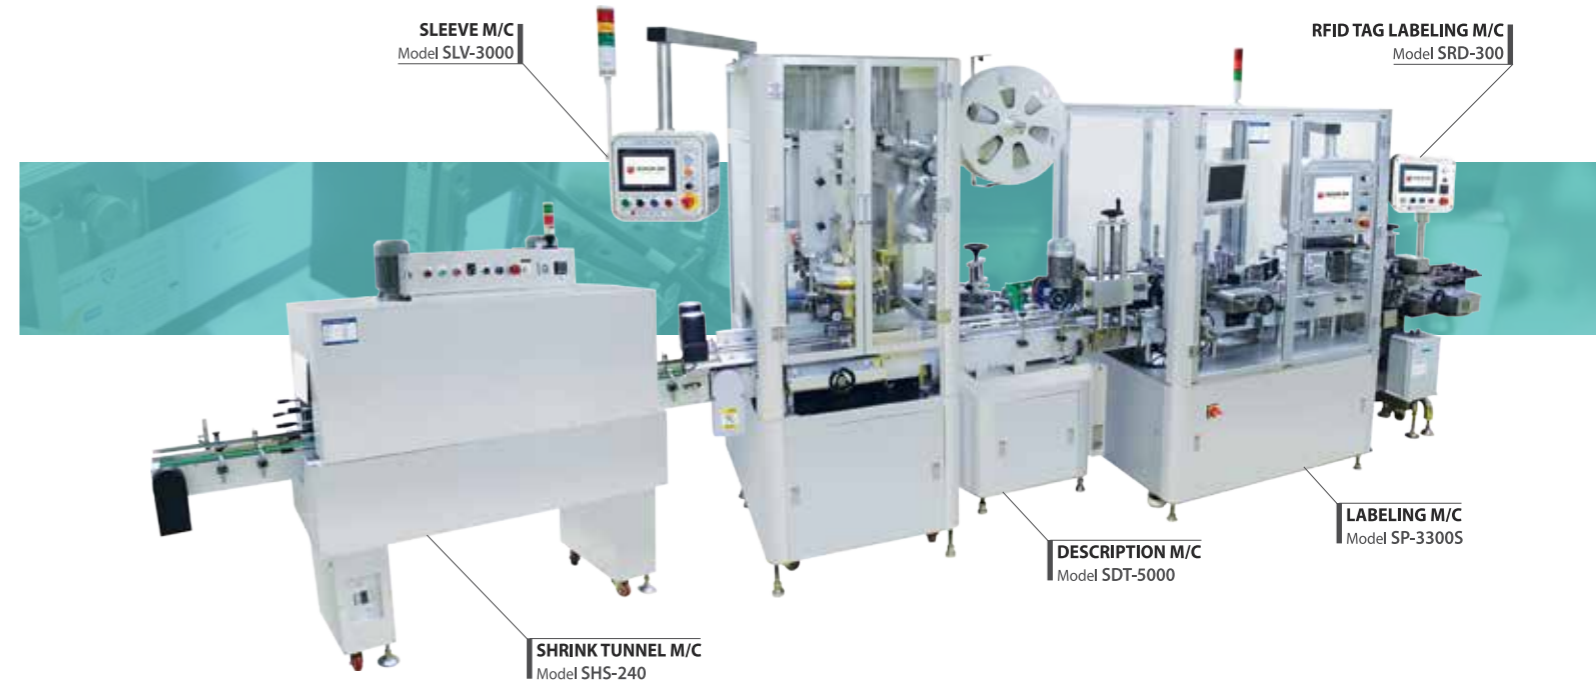

Size: 6,600mm(L) x 2,000mm(W) x 1,800mm(H)

**Application**



**Features**

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

**Options**

- Hot stamping, TTO, CIJ printer
- Missing label detector & reject unit



**MODEL NO. SC-350**  
VIAL & AMPULE LABELER

**Application**



**Standard Specifications**

- Container size: Variable
- Max. label reel diameter: 300mm
- Speed: 550ppm based on 1ml ampule
- Electrical & compressed air supply: 220V 1Ph 2kw / 5~6bar

**Features**

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

**Options**

- Hot stamping, TTO, TIJ, Laser printer
- Infeed & outfeed table or hopper
- Missing label detector & reject unit
- OCR/OCV vision system
- Validation



Size: 2,000mm(L) x 1,200mm(w) x 1,800mm(H)



**MODEL NO. SB-2700**  
BAR-CODE APPLICATOR

**Application**

- Designed to print and apply bar-code labels on side, wrap-around, or top of components.
- The position and content (text, number, etc...) of the labels is easily programmable.

**Features**

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

**Options**

- Hot stamping, TTO, TIJ, Laser printer
- Infeed & outfeed table or hopper
- Missing label detector & reject unit
- OCR/OCV vision system
- Validation



Size: 2,000mm(L) x 1,200mm(w) x 1,800mm(H)



**MODEL NO. SP-3300S**  
WRAP-AROUND LABELER

**Application**



**Standard Specifications**

- Container size: 10mm~150mm
- Max. label reel diameter: 300mm
- Speed: 100ppm or more
- Electrical & compressed air supply: 220V 1Ph 1kw / 5~6bar

**Features**

- SUS304, AL6061 construction
- Servo motor drive for label web
- Color touch screen display
- Simple container change

**Options**

- Hot stamping, CIJ, TIJ printer
- OCR/OCV vision system
- Missing label detector & reject unit
- Validation



Size: 2,200mm(L) x 1,200mm(w) x 1,800mm(H)



**MODEL NO. SJP-600**  
LABEL COUNTER

**MODEL NO. SL-300**  
SEMI-AUTOMATIC WRAP-AROUND LABELER



Size: 1,200mm(L) x 1,000mm(w) x 1,200mm(H)

**Standard Specifications**

- Speed: 40 meters per min
- Max. label reel diameter: 400mm
- Electrical & supply: 220V 1Ph 1kw

**Options**

- Hot stamping, CIJ, TIJ printer
- Missing label detector
- Validation
- Clear label sensor
- Barcode scanner



Size: 1,200mm(L) x 1,000mm(w) x 1,200mm(H)

**Standard Specifications**

- Speed: 30ppm or less
- Max. label reel diameter: 300mm
- Electrical & supply: 220V 1Ph 1kw

**Options**

- Hot stamping printer

**Sunjin System  
Machinery**  
Co.,Ltd.

44, Bucheon-ro 419beon-gil,  
Bucheon-si, Gyeonggi-do,  
Republic of Korea

Phone : +82 32 678 0400  
Fax : +82 32 678 9943  
info@sunjin-sm.net

[www.labelingmaker.com](http://www.labelingmaker.com)